



BLOCKADE™ DOCK SHELTER

MODEL BDS-K

DOCK SHELTER SPECIFICATIONS



ENTRE/MATIC

Product Summary

The Blockade Dock Shelter is designed for the most demanding environmentally controlled dock environments. It is uniquely capable of blocking air and light infiltration around the perimeter of the trailer, while also providing ambient light to enhance loading.

Design Highlights

- Exclusive AquaShield® AQS-900 Integral Rain Header protects dock from moisture infiltration with a highly resilient foam core and automatic positioning
- Exclusive Hinge Guard™ effectively seals hinge gap along opened trailer doors, is made of High Molecular Weight Polyethylene (HMWPE), and attached securely with industrial hook and loop for easy replacement
- Exclusive LightGuard™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- Exclusive roll-formed galvanized steel faming
- Head curtain wear pleats and bottom wear panels with exclusive SHARC™ (Super High Abrasion Resistant Compound) fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Impactable foam-filled side members
- Raked header for moisture run-off
- Foam-filled draft pads



Project Information

Job Name _____
 Address _____
 General Contractor _____
 Distributor _____
 Model _____ Quantity _____

Certified For Construction

By _____
 Company _____
 Address _____
 Date _____

Entrematic reserves the right to change specifications and designs without notice and without incurring obligations. Entrematic products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Entrematic as word and logo are registered trademarks belonging to Entrematic Group AB or other companies controlled by the same organization. All rights reserved.


1612 Hutton Drive, Suite 140 • Carrollton, TX 75006, USA • Tel: 800-558-6960 • Fax: 972-389-4766 • Email: kelley@entrematic.com • www.kelleyentrematic.com

©Entrematic Group AB 2015. All Rights Reserved.

BLOCKADE DOCK SHELTER

MODEL BDS-K

DOCK SHELTER SPECIFICATIONS

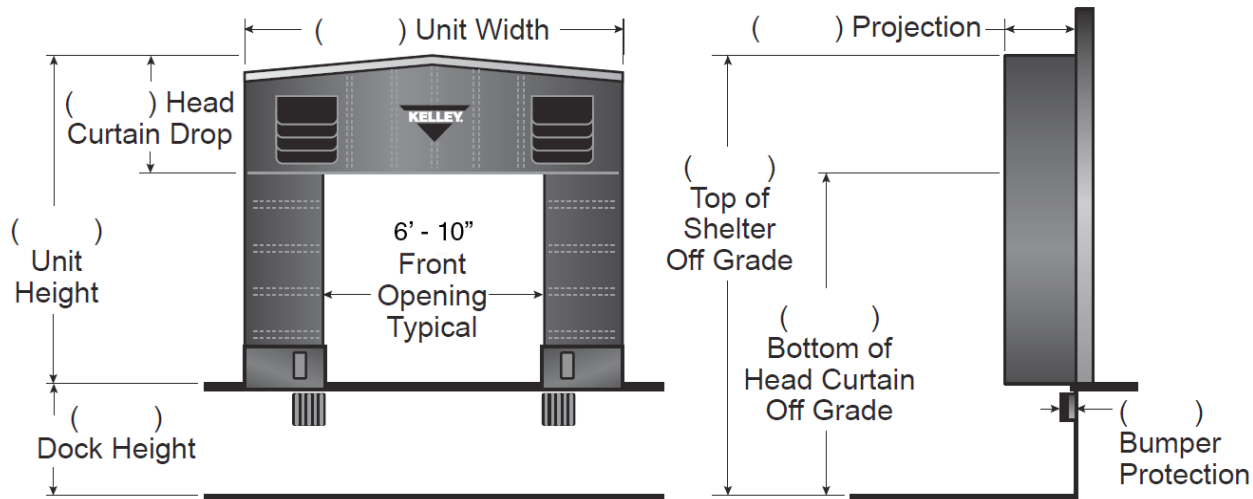

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.
 Height: _____ Max. _____ Min.
 Length: _____ Max. _____ Min.
 Type of Trailer: Standard Refrigerated
 [*Not Applicable for Hydraulic Tailgate, Rear Step Section]

APPLICATION DATA

Door Width: _____ ft. _____ in.
 Door Height: _____ ft. _____ in.
 Dock Height: _____ ft. _____ in.
 Bumper Protection*: _____ in.
 [*Includes bumper projection and any building wall/foundation offset or cantilever]

QUANTITY _____

Drive/Approach Level Incline Decline _____ % of Grade

Please check box from each category:

Building Wall Structure: Metal Other

Unit Width: 11'-6" 11'-7" 11'-10" 12'-2"

Unit Height: 11'-0" 11'-6" 12'-0" 12'-6"

Head Member Style: Raked Flat

Curtain Material: 40 oz. Vinyl Standard 40 oz. CSM TS-55

Color: Black Only

Head Curtain Drop: 30" 36" 42" 48" 54" _____"

Taper: Yes No

Top Projection: 23" 24" 25" 26" 27" 28" 29" 30" 31" 32"
 33" 34" 35" 36" 37" 38" 39" 40" 41" 42"

Bottom Projection: 23" 24" 25" 26" 27" 28" 29" 30" 31" 32"
 33" 34" 35" 36" 37" 38" 39" 40" 41" 42"

Options: Door Numbers Full Length Guide Stripes

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

*Note: Consult factory for blockout application assistance.