


FOAMSIDE® TRUCK SHELTER

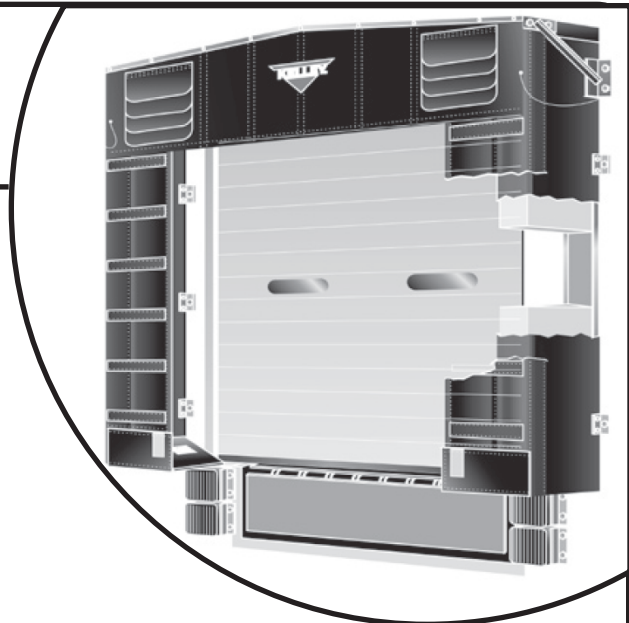

Design Highlights

- Impactable foam-filled side members
- Roll-formed galvanized steel framing
- Fiberglass stays is side/head curtains
- Side curtains feature removable stays
- Translucent head member transmits light
- Raked header for moisture run-off
- Foam-filled draft pads
- Full range of fabrics and colors


Project Information

Job Name _____
Address _____
General Contractor _____
Distributor _____
Quantity _____

Certified For Construction

By _____
Company _____
Address _____
Date _____

FOAMSIDE® TRUCK SHELTER

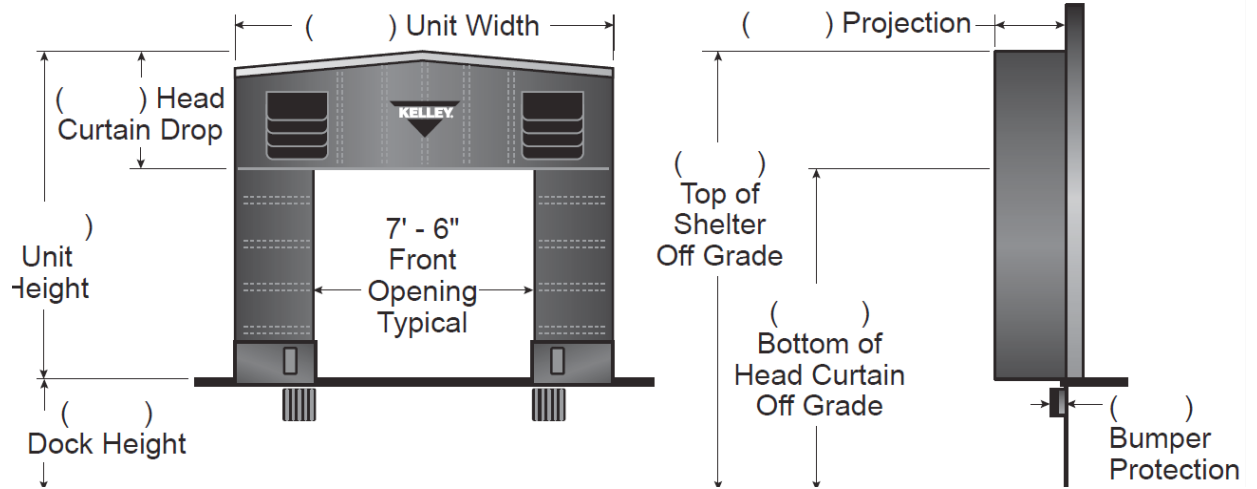

APPLICATION DATA

Door Width: _____ ft. _____ in.
 Door Height: _____ ft. _____ in.
 Dock Height: _____ ft. _____ in.
 Bumper Protection*: _____ in.
 (*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.
 Height: _____ Max. _____ Min.
 Length: _____ Max. _____ Min.
 Hydraulic Tailgate: Yes No
 Rear Step Section: Yes No
 Tailgate/Step Section Size: _____ In.
 Yard Jockeys: Yes No

Drive/Approach Level Incline Decline _____ % Grade

Building Wall Construction: Metal Other

Unit Width 11'6" 12'0" 12'6"

Unit Height 11'0" 11'6" 12'0" 12'6"

Head Member Style Raked Flat

Curtain Material XL-100™ 40 oz. CSM 40 oz. Vinyl 22 oz. Vinyl

Color Black Tan Brown Blue Green

Head Curtain Drop 30" 36" 42" 48" 54" _____"

Taper Yes No

Top Projection 18" 20" 22" 24" 26" 28" 30" 36" 42" _____"

Bottom Projection 18" 20" 22" 24" 26" 28" 30" 36" 42"

Options None Door Numbers Full Length Guide Stripes Pull Rope Assembly

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)